


We have performed testing proving that BATYLINE EDEN 7710 FR can not only be used for covering applications (cushions), but for slings as well.

The only technical condition for using EDEN 7710 FR for slings is to place the warp as showed below:

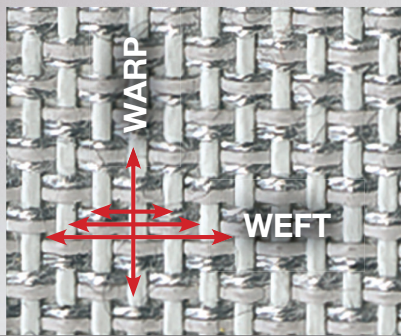


EDEN 7710 FR is a 1x3 weaving pattern.

VERY IMPORTANT: in case of using EDEN 7710 FR in the wrong sense, «sagging» (or «pocket») effect could happen.

Please refer to the following pictures:
same seat after resistance tests.

To guarantee BATYLINE EDEN's performance characteristics, the material weft must be parallel to its structural fixing axes

Correct

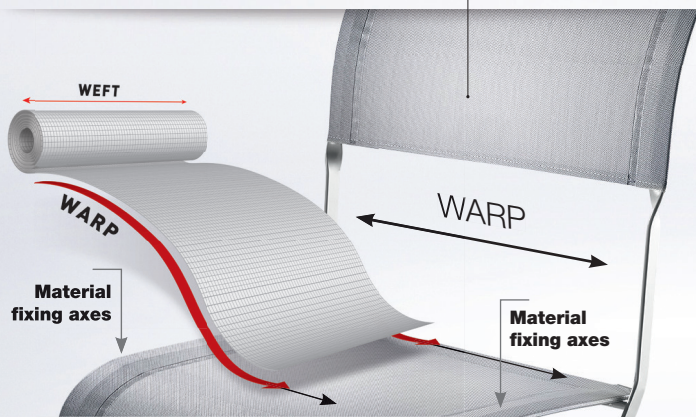

- **Correct** warp and weft sense:
No problem, the tension remains perfect, no sagging.


Incorrect



- **Incorrect** warp and weft sense:
Sagging effect could appear.



2 % minimum pre-tension is necessary.
The fabric should be cut at: (Nominal size) - (2 %).

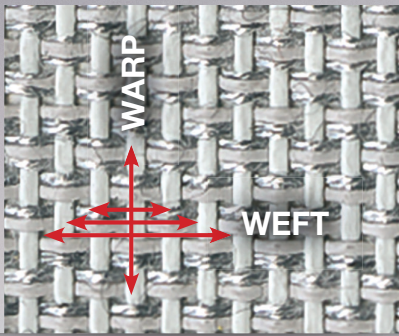

Correct



Incorrect



- **Correct** warp and weft sense:
No problem, the tension remains perfect,
no sagging.

- **Incorrect** warp and weft sense:
Sagging effect could appear.