




Hydrofend® Roll Width: 60 inches • Weight 8 oz/yd²
Hydrofend Soft Roll Width: 58 inches • Weight 10.25 oz/yd²

Hydrofend outperforms uncoated fabrics with up to six times greater water resistance, delivering the ultimate defense against the weather—an ideal cover fabric for boats, personal watercraft, patio furniture, grills, outdoor storage areas, and more. Hydrofend comes in 13 colors. Four of the colors are also available in a soft option that combines the performance of Hydrofend with the protective qualities of a soft knit backing, great for use on antique and competition boats, patio furniture, RV windshields, airplane covers, and more. Woven from durable polyester monofilament yarn, Hydrofend’s vibrancy, coupled with its tear and tensile strength, will manage many application requirements and enable it to endure season after season.


5 Year Limited Warranty

3 Year Limited Warranty for Deep Maroon and Radiant Red


Colors are representative only. Small variations in shade should be anticipated and are within commercial tolerances.

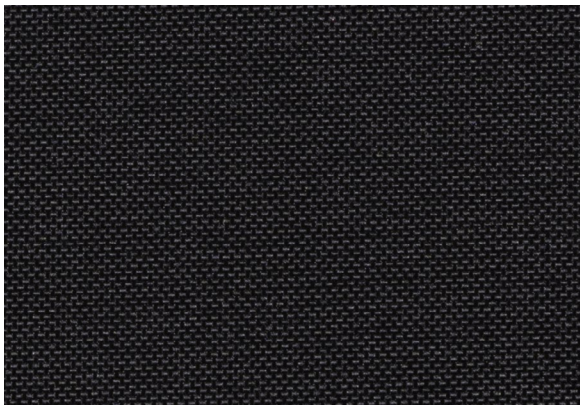


Bold Black
777134
777285 Soft
593834 Binding

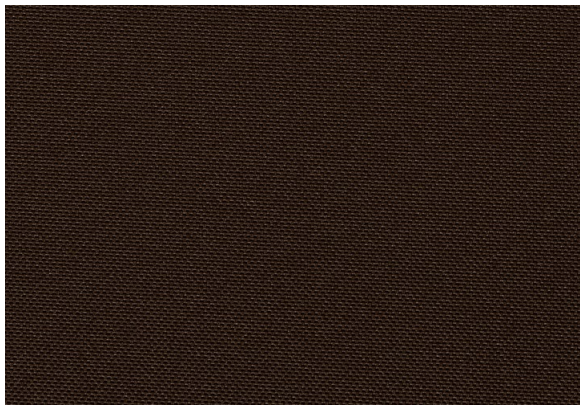


Mahogany Brown
777141
593841 Binding

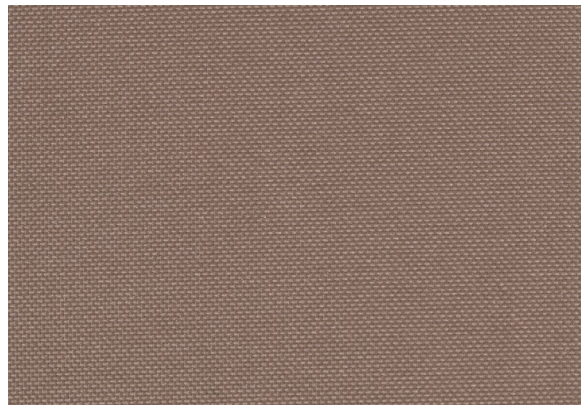


Bronze Taupe
777136
593836 Binding

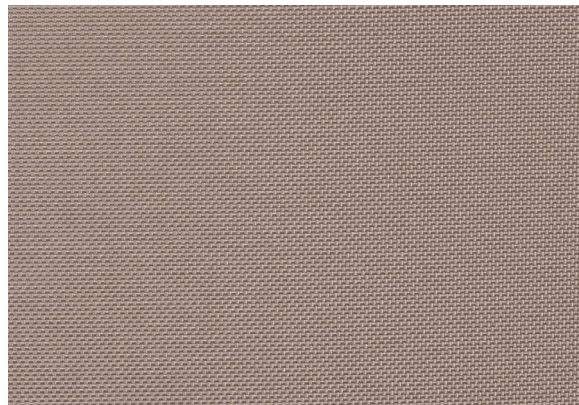


Military Tan
777131
593831 Binding

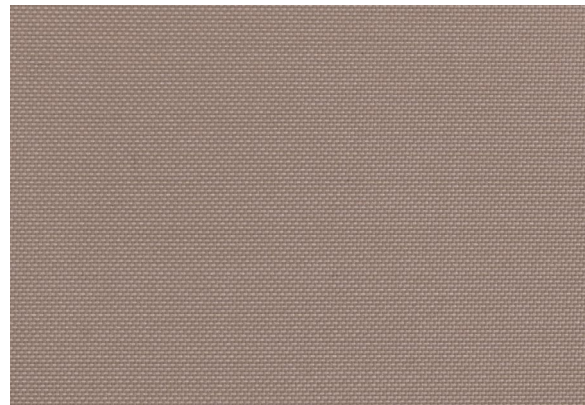


Desert Beige
777133
777288 Soft
593833 Binding

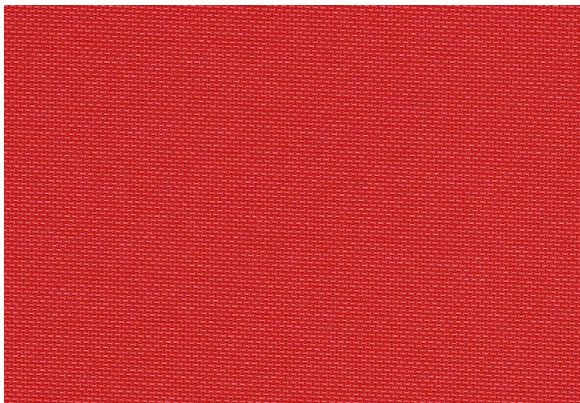


Radiant Red
777145
593845 Binding

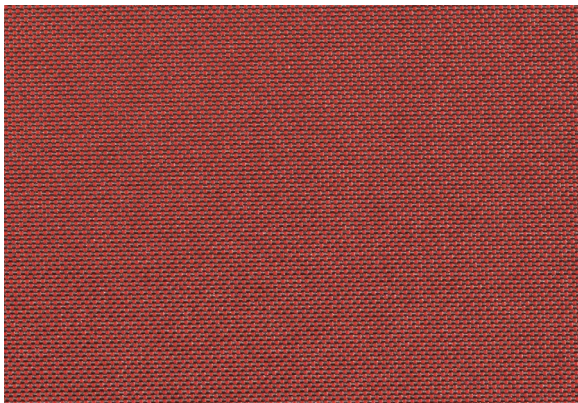


Deep Maroon
777137
593837 Binding

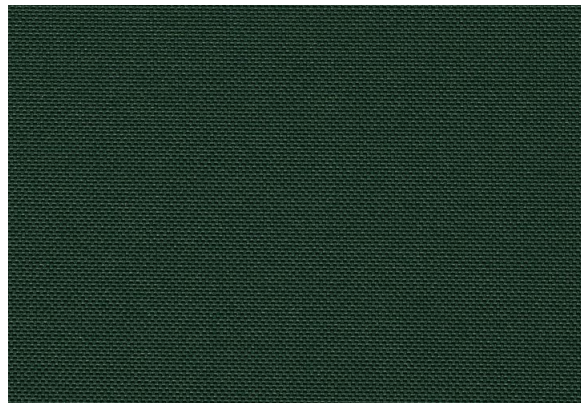


Hunter Green
777147
593847 Binding

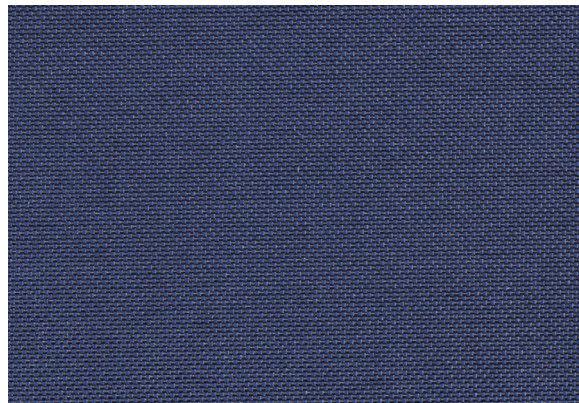

Admiral Navy
777132
593832 Binding

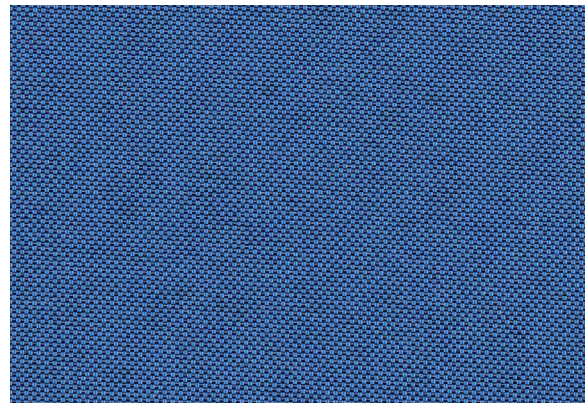


Olympic Blue
777139
593839 Binding

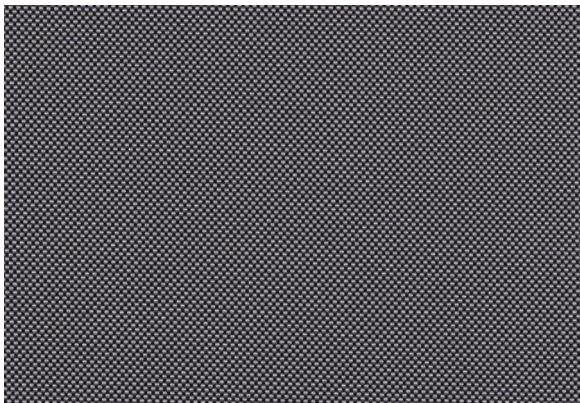

Meteor Grey
777130
777287 Soft
593830 Binding



Iron Grey
777135
777286 Soft
593835 Binding

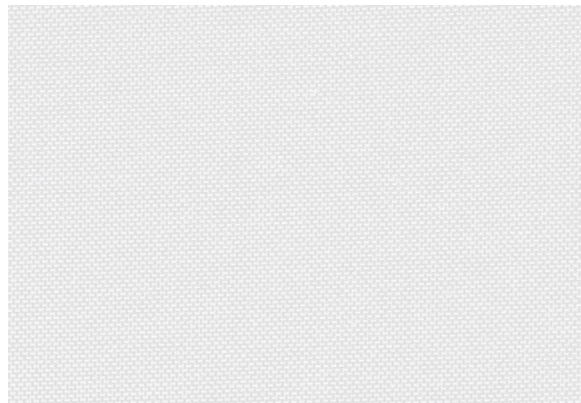

White
777129
593840 Binding

Fabric Weight ASTM D3776	Hydrofend: 8 oz/yd ² Hydrofend Soft: 10 oz/yd ²
Roll Size	100 yards (91 meters)
Finished Fabric Width ASTM D3774	Hydrofend: 60 inches (152cm) Hydrofend Soft: 58 inches (147cm)
Hydrostatic Test AATCC 127	79 inches (200cm)
Spray (Large) AATCC 22	100
Break Strength ASTM D5034	Warp: 375 pounds Fill: 345 pounds
Tear Strength ASTM D2261	Warp: 40 pounds Fill: 40 pounds
Circular Bend Stiffness ASTM D4032	5.09
Wyzenbeek Abrasion ASTM D4157	100,000 double rubs
Color Fastness to Light AATCC 2261	4-5 after 2,000 hours
Mullen Burst ASTM D3786	200+ psi
Taber Abrasion ASTM D3884-09 (H-22 wheels, 1,000 gram load)	9,000 cycles
Water Vapor Transmission ASTM E96B	326 grams
Cold Crack -40°F, ASTM D1912	Pass
Warranty	5 years 3 years for Deep Maroon and Radiant Red

 **Hydrofend**®

**The ultimate defense
against the weather.**