



STYLE  
2000 / 2100

---

WEAVING  
EXCELLENCE  
WITH  
INNOVATION



Code	Color	SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind) SINGLE	
		TS	RS	AS	TV	1/4 CL	1/4 HA
<b>STYLE 2000 - 5%</b>							
P02	White	20	67	13	16	0.30	0.28
P04	White/Bone	18	61	21	13	0.32	0.30
P05	White/Platinum	13	49	38	11	0.38	0.32
Q05	Bone	18	55	27	12	0.36	0.31
Q06	Bone/Platinum	12	43	45	10	0.41	0.34
Q10	Bronze	5	7	88	6	0.59	0.44
V04	Platinum	10	35	55	9	0.45	0.37
V21	Charcoal	6	4	90	6	0.61	0.44
V22	Charcoal/Gray	7	9	84	7	0.58	0.44
V24	Charcoal/Chestnut	6	7	87	6	0.59	0.44
<b>STYLE 2100 - 10%</b>							
P02	White	22	60	18	16	0.34	0.30
P04	White/Bone	19	54	27	14	0.37	0.31
P05	White/Platinum	16	47	37	12	0.40	0.33
Q05	Bone	19	44	37	15	0.42	0.35
Q06	Bone/Platinum	16	38	46	14	0.44	0.36
Q10	Bronze	8	5	87	9	0.61	0.44
V04	Platinum	10	31	59	9	0.47	0.37
V21	Charcoal	9	4	87	10	0.62	0.44
V22	Charcoal/Gray	11	8	81	12	0.60	0.44
V24	Charcoal/Chestnut	11	6	83	12	0.61	0.44



PROTECTION THAT LIVES ON  
**MICROBAN®**

Microban® antimicrobial protection inhibits the growth of stain-causing bacteria, mold and mildew on the shade.



PRODUCT CERTIFIED FOR  
 LOW CHEMICAL EMISSIONS  
 UL.COM/GG  
 UL 2818



MIF Seal of Approval



TS = Solar Transmittance  
 RS = Solar Reflectance  
 AS = Solar Absorptance  
 TV = Visual Transmittance


SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass  
 1/4 HA = 1/4" Heat Absorbing Glass


Fabrics Installed Internally  
 Zero-Degree Profile Angle

For additional performance values, test references and technical definitions visit us at [www.phifer.com](http://www.phifer.com).


P02 **White**

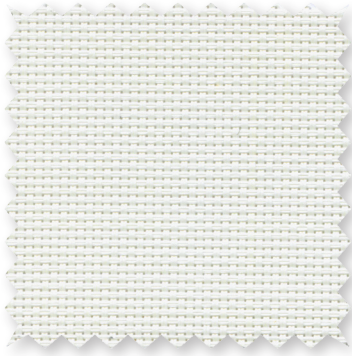


P04 **White/Bone**

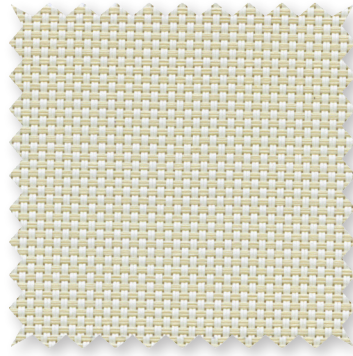


P05 **White/Platinum**

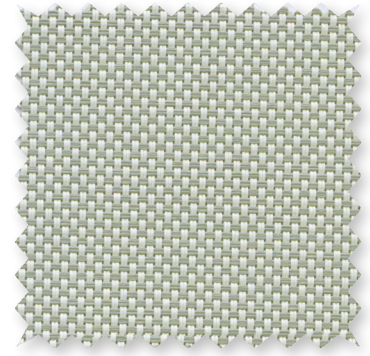


Q05 **Bone**

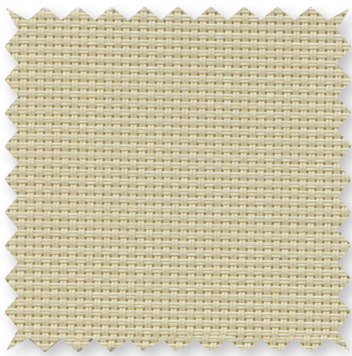


Q06 **Bone/Platinum**

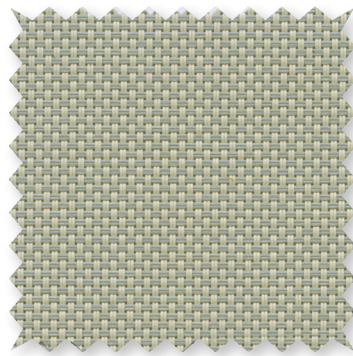


V04 **Platinum**

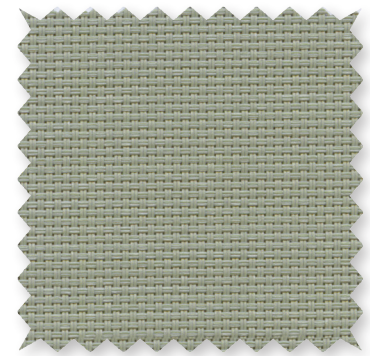


Q10 **Bronze**

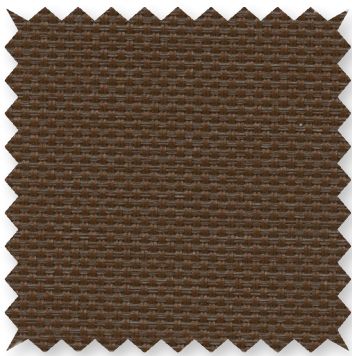


V22 **Charcoal/Gray**

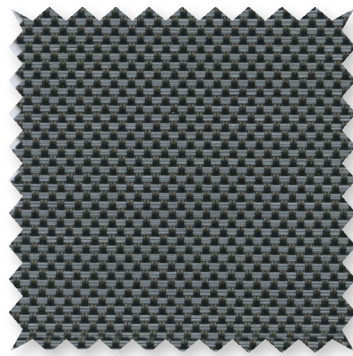

V24 **Charcoal/Chestnut**

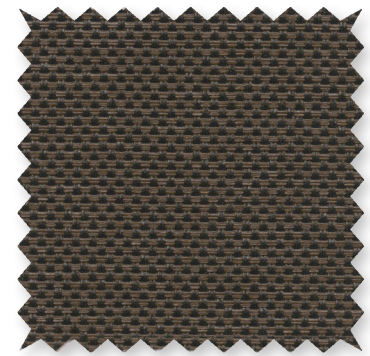

V21 **Charcoal**

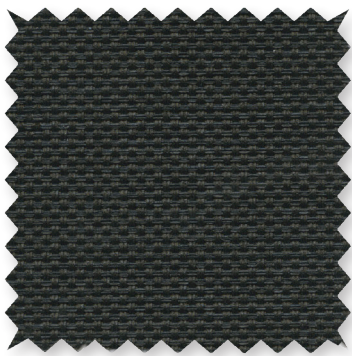

\*Colors may vary based on individual computer settings and should only be used for general reference.

# STYLE 2000 / 2100 SPECIFICATIONS

The original SheerWeave fabrics, Styles 2000 and 2100 are vinyl coated fiberglass basketweaves designed expressly for those applications that require a more opaque and non-directional fabric. Style 2000/2100 can also be used in exterior shading systems.

<b>FIRE CLASSIFICATION</b>	California U.S. Title 19 (small scale)	NFPA 701 TM#1 (small scale)
	NFPA 101 (Class A Rating)	IBC Section 803.1.1 (Class A Rating)
	BS 5867 Part 2 Type B Performance	NFPA 701 TM#2 (large scale)
	CAN/ULC-S 109 (large and small scale)	CAN/CGSB2-4.162-M80

*Fire classifications are subject to change. Please go to [phifer.com](http://phifer.com) for the most current information.*

<b>BACTERIA AND FUNGAL RESISTANCE</b>	ASTM E 2180	ASTM G21	AATCC30 Part 3	ASTM D 3273
	GREENGUARD Mold and Bacteria Standard ASTM 6329 includes Microban antimicrobial additives			
<b>ENVIRONMENTAL CERTIFICATION</b>	GREENGUARD	GREENGUARD Gold		
	Certified to these standards for low chemical emissions into indoor air during product usage			
<b>LEAD FREE</b>	RoHS/Directive 2002/95/EC	REACH (EC 1907/2006) compliant		
	ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101			
<b>WARRANTY</b>	10-year interior	5-year exterior		
<b>ACOUSTICAL PERFORMANCE</b>	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a			
<b>UV PROTECTION</b>	Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes			
<b>TRACKLESS</b>	TrackLess Technology minimizes the fiberglass yarns' inherent tendencies to track when being rolled up in a shade. With TrackLess Technology these same fabrics now track less, roll up straighter and reduce shade fabrication time.			

STYLE	2000	2100
<b>WIDTHS</b>	63", 98" and 126" 160 cm, 248.9 cm and 320 cm	63" and 98" 160 cm and 248.9 cm
<b>ROLL LENGTH</b>	30 Linear Yards 27.4 m	30 Linear Yards 27.4 m
<b>COMPOSITION</b>	37% Fiberglass 63% Vinyl on Fiberglass	37% Fiberglass 63% Vinyl on Fiberglass
<b>MESH WEIGHT</b>	14.4 oz/yd <sup>2</sup> 488 g/m <sup>2</sup>	12.9 oz/yd <sup>2</sup> 437 g/m <sup>2</sup>
<b>FABRIC THICKNESS</b>	0.021 in 0.53 mm	0.021 in 0.53 mm
<b>OPENNESS FACTOR</b>	Approximately 5%	Approximately 10%
<b>UV BLOCKAGE</b>	Approximately 95%	Approximately 90%
<b>ACOUSTICAL VALUE</b>	NRC .10 / SAA .11	NRC .05 / SAA .06

**PHIFER**  
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403 -1700 USA  
Phone: 205.345.2120 • FAX: 205.391.0799  
Toll Free USA/Canada: 1.800.221.5497  
[phifer.com](http://phifer.com) • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.  
© MICROBAN is a registered trademark of Microban Products Company.  
™ UL, the UL logos and the UL mark are trademarks of UL LLC.  
Photo courtesy of Draper INC., Spiceland, Indiana, USA.  
© PHIFER INCORPORATED V18 3033831