


VELCRO® Brand
Velstick® 192657

Technical Data Sheet
 July 2020

PRODUCT DESCRIPTION

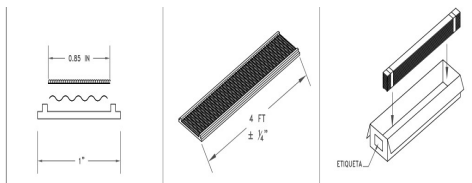

Velcro® Brand Velstick®, VSH081 1-0/0" 330 9999 BLK 4 FT BLACK (840 FT PER BOX) PAD 12737-0

VELCRO® Brand Velstick® is commonly used in the Industrial market.

PRODUCT CONSTRUCTION

Fastening system	VELCRO® Brand Velstick® 1" wide
Construction	Rigid PVC Profile Laminated to Velcro Brand Hook Style 088 using Polyurethane Hot Melt Adhesive.
Composition	- EXT VLSTK 1" BLK QTY PER ROLL: 1,200 FT (3,600 FT MAX PER GAYLORD) - ADH HL-9527 HOT MELT 400LB DRUM - TAPE H81 04-1/4 330 0599 OTHER 42500813300599AM BLACK
Profile Thickness	0.043 inches (minimum)
Hook Thickness	0.050 inches (minimum)
Widths available	1" +/- 0.02"
Length available	4 Feet
Colour available	Black

* The above should be considered typical values and is intended to be used as a reference only. This information should not be used for specification purposes. Suitable performance for a specific intended application should be evaluated by the user.

PERFORMANCE CHARACTERISTICS*

Tested with: Velcro Brand Loop 1000



Testing	Minimum
Hook Closure Peel Strength	0.50 PIW [0.876 N/cm]
Hook Closure Shear Strength	16.0 LB1 [11 N/cm²]

* The above should be considered typical values and is intended to be used as a reference only. This information should not be used for specification purposes. Suitable performance for a specific intended application should be evaluated by the user.

SUGGESTED APPLICATIONS

Below is a brief description of the typical applications in which the **VELCRO**[®] **Brand Velstick**[®] 1" wide fasteners may be used.

**INDUSTRIAL**

COUNTRY OF ORIGIN**USA**

REGULATORY ELEMENTS

For product declarations of conformity on regulatory elements and additional information, contact ProductCompliance@velcro.com.

PRODUCT USE

The information, statements and comments contained within this document are based on our experience and testing and are believed to be accurate. However, because there are many factors involved in specific applications that can impact end use and performance, product users should always test the product for its ability to meet the requirements of their specific use and method of application.

LIMITED WARRANTY

Velcro Companies^(*) warrants that all of its products will substantially comply with its written specifications at the time of shipment. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY DISCLAIMED. The product user is responsible for determining whether the product is fit and suitable for the intended application. If the product does not meet specifications as warranted, we will, at our option, repair or replace the product, or credit or refund the purchase price. The foregoing constitutes the user's sole remedy and our sole obligation hereunder.

(*) Velcro Companies includes all the partner companies involved in the development, manufacture or sale of the products.

LIMITATION OF LIABILITY

To the maximum extent permitted under applicable law, our liability for any losses or damages relating to use of the product shall not exceed the purchase price for such product, regardless of whether such losses or damages are direct, indirect, special, incidental or consequential, and regardless of the legal theory asserted, including, but not limited to, warranty, contract, negligence or strict liability.

Given the diversity of our products, we recommend that our customers verify that the product satisfies the requirements of their application. The customer is responsible for the application and use of the product.

VELCRO[®] and other brands are owned by Velcro BVBA © 2019